


## PowerMir

### 200 mW Pulsed QCL 9,7 microns HHL



**PowerMir** product line is high power pulsed Quantum Cascade Laser based on proprietary technology, emitting in LongWave-Infra-Red. It provides maximum average power of at least 200 mW at 9,7 microns. The High Heat Load (HHL) package (spec code: PW9700200HNA) includes the high power laser mounted in a thermoelectric cooler and suitable optics to collimate the output of the laser.

ITAR free MirSense technology exhibits outstanding performances in term of power and wall plug efficiency. This high-performance QCL assembly takes full advantage of state of the art technologies.

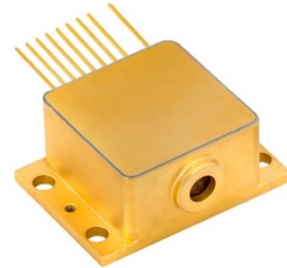

#### Optical features


Maximum Average Optical Power	> 200 mW at +20°C of base plate temperature
Mode of operation	Quasi-CW, high duty cycled pulsed
Central wavelength	9,7 $\mu\text{m}$ +/- 0.2 $\mu\text{m}$
Pulse frequency	> 500 kHz
Divergence	Horizontal < 8 mrad (typically 6mrad) Vertical < 6 mrad (typically 4mrad)
Beam quality	TM00 Gaussian beam, $M^2 < 1.5$
Output beam dimension (typ.)	2 mm x 3 mm
Polarization	Linear vertically polarized

#### Mechanical and electrical features


Packaging	Hermitically sealed with nitrogen gas fill inside a High-Heat Load (HHL) package.
Wall-plug efficiency	< 5 %
Built-in TEC included	$I_{\text{max}} = 5.2\text{A}$ , $V_{\text{max}} = 15.7\text{V}$
Laser current (typ.)	1.5 A
Laser voltage	10 to 20 V
Operational temperature	-20°C to +30°C @ base plate. This working environmental temperature must in any case be above dew point to avoid water condensation
Reliability	> 3500 hrs
Weight	70 grams

## Drawings


All dimensions are in mm

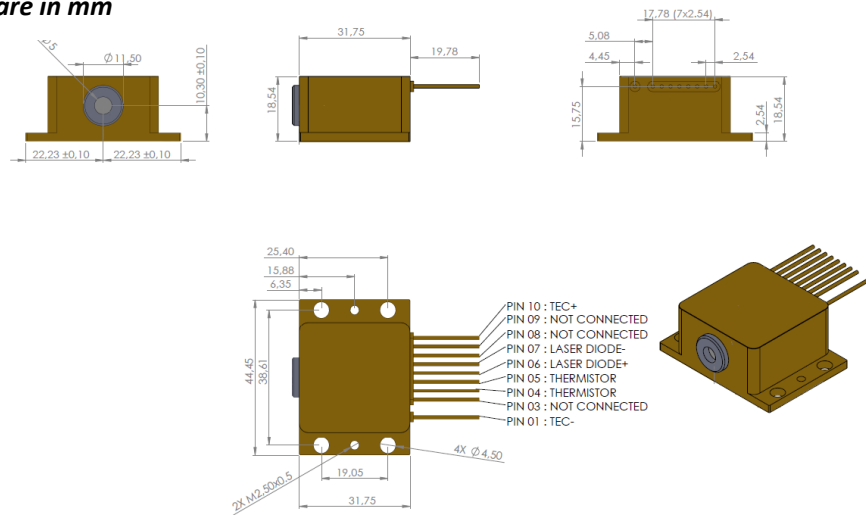

## Typical Characteristics

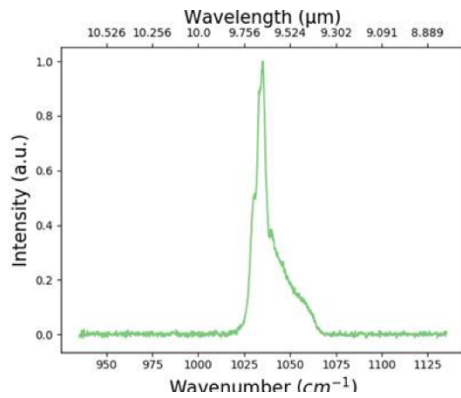

Typical spectrum

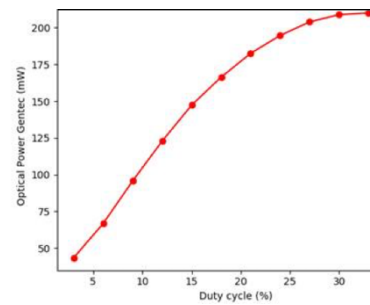

Average optical power of the laser as a function of the laser duty cycle with a pulsewidth of  $900 \text{ ns}$  and a laser temperature of  $+20^\circ\text{C}$

## Options

- Driver for laser modulation
- Customized packaging upon request